

# S18 6"

Pompe per pozzi da 6"  
Pumps for 6" wells  
Pompes pour puits de 6"

1



Bocca di mandata in ottone.  
Brass discharge head.  
Piese de refolement en laiton.

2



Valvola di non-ritorno incorporata sulla testata.  
Discharge head non return valve.  
Clapet anti-retour incorporé.

3



Bronzina superiore in bronzo o, a richiesta, in gomma antisabbia.  
Upper bush made in bronze or, upon request, in anti-sand rubber.  
Palier superieur en bronze ou sur demande en caoutchouc anti sable.

4



Giranti e diffusori in Noryl con anelli di rasamento in acciaio inox. Alto rendimento.  
Noryl made impellers and diffuser with stainless steel wear-inserts. High efficiency.  
Roues et diffuseurs en Noryl avec anneaux d'usure en inox. Haut rendement.

5



Camicia in acciaio inox.  
Stainless steel shell.  
Chemise en acier inox.

6



Filtro in acciaio inox.  
Stainless steel strainer.  
Crepine en acier inox.

7



Flangia d'accoppiamento secondo norme NEMA.  
Bracket to couple to the motor acc.to NEMA standards.  
Bride d'accouplement au moteur selon normes NEMA.

1

2


3

4

5

6

7

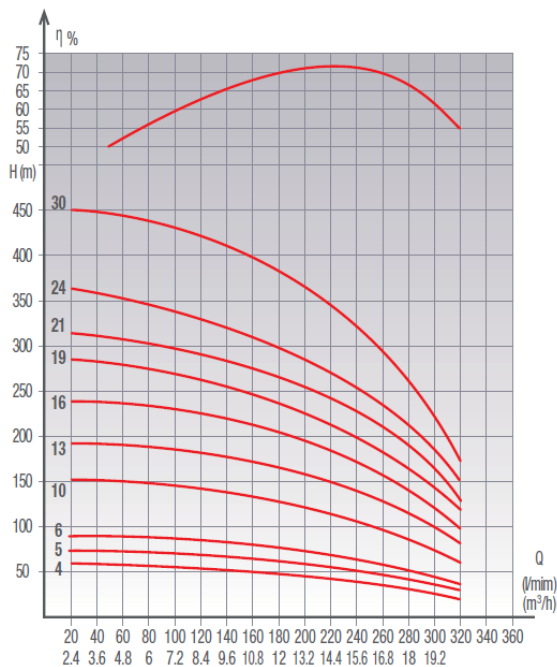

Tipo Type Type	Motore Motor Moteur		Q Portata - Capacity - Debit															Dimensioni e Pesì Dimension and Weight Dimension et Masses								
	kw	HP	L/min.	PREVALENZA m - TOTAL HEAD m - HAUTEUR D'ELEVATION m															mm	kg						
				0	120	140	160	180	200	220	250	300	0	7.2	8.4	9.6	10.6	12			13.2	15	18	0	31.70	36.99
S18-4	2.2	3		59	57	55	53	50	49	46	41	29	575	13.5												
S18-5	3	4		75	71	70	66	63	61	57	51	36	610	14.1												
S18-6	4	5.5		90	85	83	79	76	72	69	62	44	650	14.6												
S18-10	5.5	7.5		150	143	138	133	127	122	115	100	71	805	16.8												
S18-13	7.5	10		193	183	178	175	168	160	150	134	96	920	18.5												
S18-16	9.3	12.5		241	228	222	215	206	196	184	162	117	1030	20.1												
S18-19	11	15		285	270	262	255	244	233	217	192	140	1145	21.8												
S18-21	13	17.5		314	300	291	281	269	256	241	218	155	1220	22.9												
S18-24	15	20		359	343	333	321	308	292	275	258	177	1335	24.6												
S18-30	18.5	25		449	429	416	402	385	365	344	311	221	1615	28.9												