

S36 6"

Pompe per pozzi da 6"
Pumps for 6" wells
Pompes pour puits de 6"

1



Bocca di mandata in ottone.
Brass discharge head.
Piese de refoulement en laiton.

2



Valvola di non-ritorno incorporata sulla testata.
Discharge head non return valve.
Clapet anti-retour incorporé.

3



Bronzina superiore in bronzo o, a richiesta, in gomma antisabbia.
Upper bush made in bronze or, upon request, in anti-sand rubber.
Palier superieur en bronze ou sur demande en caoutchouc anti sable.

4



Giranti e diffusori in Noryl con anelli di rasamento in acciaio inox. Alto rendimento.
Noryl made impellers and diffuser with stainless steel wear-inserts. High efficiency.
Roues et diffuseurs en Noryl avec anneaux d'usure en inox. Haut rendement.

5



Camicia in acciaio inox.
Stainless steel shell.
Chemise en acier inox.

6



Filtro in acciaio inox.
Stainless steel strainer.
Crepine en acier inox.

7



Flangia d'accoppiamento secondo norme NEMA.
Bracket to couple to the motor acc.to NEMA standards.
Bride d'accouplement au moteur selon normes NEMA.

1

2


3

4

5

6

7

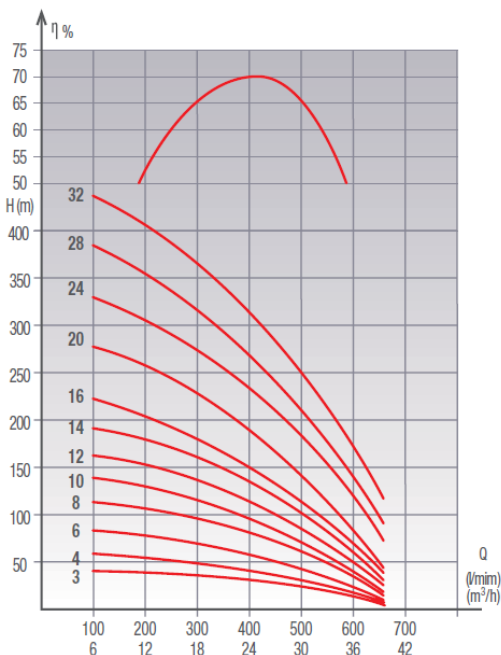

Tipo Type Type	Motore Motor Moteur		Q Portata - Capacity - Debit						Dimensioni e Pesì Dimension and Weight Dimension et Masses		
	kw	HP	PRESSIONE m - TOTAL HEAD m - HAUTEUR D'ELEVATION m						mm	kg	
			m³/h	0	12	18	24	30			36
			Usqpm	0	52.84	79.26	105.68	132.10	158.52		
			L/min.	0	200	300	400	500	600		
S36-3	3	4		44	38	34	28	21	12	590	12.2
S36-4	3.7	5		58	50	46	38	27	16	650	14
S36-6	5.5	7.5		87	76	68	56	42	24	765	15.6
S36-8	7.5	10		117	101	91	75	55	32	880	17.2
S36-10	9.3	12.5		146	127	114	95	70	40	990	18.8
S36-12	11	15		174	152	137	114	84	48	1105	20.4
S36-14	13	17.5		204	178	160	133	98	56	1220	22
S36-16	15	20		233	203	182	151	112	64	1335	23.6
S36-20	18.5	25		292	254	228	190	140	80	1615	27.1
S36-24	22	30		350	305	274	228	168	97	1840	30.7
S36-28	26	35		403	355	316	267	207	130	2070	34.3
S36-32	30	40		465	403	364	312	247	156	2295	38

MANDATA - DISCHARGE - REFOULEMENT
Z 1/2